

STURDY TANK ACCESSORIES

STURDY Tank Plinths

The Sturdy Storage Tank Support Plinths offer an ideal and secure support base for your Oil Storage Tank or Water Storage Tank, ensuring a longer life.

- There are two different plinth models available, a cylindrical version and a flat version.
- Both plinths are designed to take the load of all Sturdy Tanks up to 5000lit in capacity.
- Manufactured to exacting standards and detailed specification using UV stabilised medium density polyethylene the plinths are extremely strong and durable.
- They are relatively maintenance free as they do not need to be painted and will never rust or rot.
- The plinths are available in a range of standard colours to meet your requirements.



Cylindrical Plinth

Cylindrical Plinth

Width: 1870mm Length: 1980mm Height: 700mm

Code: 167 - A



Flat Plinth

Flat Plinth

Width: 1400mm Length: 1980mm Height: 400mm

Code: 168 - A

STURDY Fuel Pod

The STURDY Fuel Pod is a fully enclosed pumping station designed specifically to house a fuel pump, hose kit and nozzle.

- The Pod comes complete with Pump, Hose Kit & Nozzle and is ideal for construction sites, transport companies and factories.
- It has a large lid and opening to allow easy access, a lockable nozzle to prevent against theft and a false floor to so the hose is not sitting on the soiled floor.
- The Fuel Pod suitable for the complete range of Sturdy Products Tanks and Bunds
- As an optional extra your company name can be printed on the Fuel Pod Pumping Station to help promote your company.
- A lockable system is available as an optional extra.



Width: 590mm Length: 900mm Height: 900 mm

Code: 363 - A

STURDY Apollo Contents Gauge

The Sturdy Apollo Oil Gauge is the most reliable oil tank gauge on the market today.

- The Apollo Gauge uses a high quality FM signal to send out tank readings to a receiver placed in your home or office.
- It is easy to install and can be ready for use within minutes.
- This Apollo Gauge is a universal tank gauge, meaning that it can be fitted to any size or shape of tank up to 3 metres in height.
- The Gauge shows levels of fuel in your tank as a 10 bar display on the receiver.
- The transmission range is 200m and the transmitter contains a tried and tested long life lithium battery.



Tank Depth Measurement : Min. Depth : 0,1 m, Max. Depth : 3 m

Code: 335 - A

STURDY Metering Pump and Hose Dispenser

The Sturdy Metering Pump and Hose Dispenser has been developed for the distribution of diesel fuel.

- Self priming rotary vein pumps with incorporated by-pass valve.
- Motor with protection grade IP55 and thermal protection, 230V AC single phase.
- Three meters of antistatic rubber hose for fuel.
- Automatic type dispensing nozzle with on-off switch incorporated into the nozzle rest and fitted with a shut-off device for full tanks.
- The flow-meters mounted on pumps have sturdy mechanical readout systems whose reliability and easiness to use have been proved by time.
- Simple and versatile, CUBE pumps can also be installed on drums, thanks to their 1" quick couplings.



Width: 378mm Length: 430mm (incl. nozzle) Height: 297mm

Code: 380 - A

STURDY Bund Alarm

- The Bund Alarm provides an early warning of a breach in the bund layer of the tank.
- Should a significant amount of fluid get between the tank and the bund the unit will emit a 90dB warning alarm.
- It is available in battery and solar powered options.
- The battery operated version has PP3 9v Battery.
- The unit is provided with a liquid detection probe.
- The system is also available for use as an overflow alarm or as a bund and overflow alarm combined.



Width: 110mm Length: 60mm Height: 110mm

Code: 443 - A

STURDY TANK ACCESSORIES

STURDY 2" Fill Stop

- The Sturdy Fill Stop is a universal design which fits metal or plastic tanks utilising fitting accessories included in kit
- It terminates in a hard-anodised 2" BSP Parallel thread, suitable for direct connection to filling tanker hoses.
- For use with thin viscosity petroleum fuels, such as diesel and kerosene
- Each Valve is tested in accordance with EN13616:2004
- Performance;
 - Maximum Flow 580 lpm
 - Minimum Flow 23 lpm
 - Leakage Rate <2.5 lpm
 - Maximum Filling Pressure 8 bar
 - Minimum Filling Pressure 0.15 bar
 - Maximum Pressure Surge 12 bar
 - Thread Size / Type 2" BSP Parallel Male



Overall Diameter: 82mm Overall Height: 245 mm

Code: 450 - A

STURDY Sturdy Dispensing Hose & Nozzle Kit

- The Sturdy Dispensing Hose and Nozzle Kit is appropriate for dispensing small quantities of diesel fuel, paraffin or light oils.
- It is of strong design and can be used in arduous situations.
- The gate valve can be supplied with a locking bracket if required.
- The gate valve and hose are 1" as standard.
- The hose is available in 3m lengths as standard however longer lengths are available upon request.
- The hose itself is diesel resistant with a nylon reinforcement.




1" X 3m Hose as Standard

Code: 018 - A

STURDY Sight Gauge

- The Sturdy External Sight Gauge gives a clear reading of the level of contents in a storage tank.
- It is suitable for fitting to most storage tanks and can be supplied in lengths to suit any depth storage tank.
- It has an unbreakable sight gauge and can be used with heating oil, paraffin and diesel.
- The top cap protects against insects and dust. The top clip provides upper support for the sight tube and it is supplied with self tapping fixing screws.
- A control valve should always be fitted at the outlet first. This is not supplied with the External Sight Gauge, however it can be supplied as an optional extra.

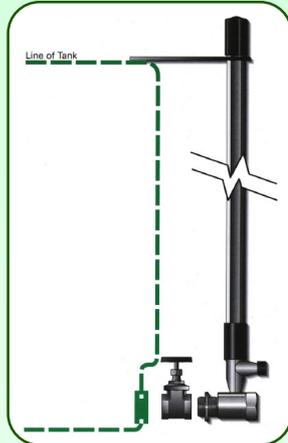

Suits Standard 1" BSP Connections. Max. Height - 1830mm

Code: 442 - A

STURDY Scully Contents Gauge

- The easy to install Scully Contents Level Gauge works perfectly under all weather conditions.
- It eliminates inaccurate readings and it can be used if the storage tank is indoor or outdoors.
- It reads if the storage tank is full, 3/4, 1/2, 1/4 or empty.
- The exposed part of the gauge is galvanised to help prevent against rusting.
- The Scully Gauge is suitable for 1.5" - 2" Fittings.



Suitable for Tanks with a minimum height of 27".

Code: 142 - A

STURDY Access Platform

- The Sturdy Tank Access Platform and Ladder gives access to the top of large storage tanks.
- The fill inlet, valves, content level gauges and other structures, to which the tank operator must have access in order to fill the tank with liquid, are usually located on the topmost surface of the large storage tank.
- The tank operator needs to have a safe and secure access to the top of the tank to fill the tank and to adjust or repair the controls when required.
- The Tank Access Platform and Ladder is designed to provide a safe vertical path between the ground and a flat work platform attached to the ladder at the top of the tank.
- Guardrails are provided to enhance the safety of the platform. It can be ground anchored by use of anchor bolts.



Width: 600mm Length: 600mm Height: 2400mm (to platform)

Code: 381 - A

STURDY Adblue Pump

- The Sturdy Adblue Pump is ideal for pumping the chemical Adblue from a storage tank into a vehicle.
- Adblue is a non toxic solution used in the exhaust system of Euro4 or Euro5 trucks to reduce harmful emissions
- AdBlue is sprayed into the exhaust manifold where it breaks-down and reacts with the exhaust gases and turns them into eco-friendly water and nitrogen.
- Trucks registered in the EU are required to be compliant with exhaust emissions regulations. Most trucks engines therefore require SCR technology which uses Adblue.
- Pump Specification
 - 370W Electric Pump
 - Digital Meter
 - Automatic inox nozzle
 - Meter Accuracy: +/- 1%



4m Delivery Hose as Standard with a Flow Rate of 40lt/minute.

Code: 521 - A